

Dynasty® LED Omni Light 801 Series



Specifications

Model	801-10W
Power Consumption	≤10W
Input Voltage	AC100-277V 50-60Hz
CCT*	3000K / 4000K / 5000K
Power Factor	≥0.9
CRI	>80
Lumen	1000±50lm
LED	Samsung
LED Quantity	0.3W x 32 LEDs
LED LM80	Yes

* Other CCTs available upon request.



Samsung LEDs



Rubycon Capacitors





E26 Base




JAE Connectors


Dimensions

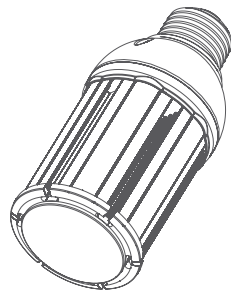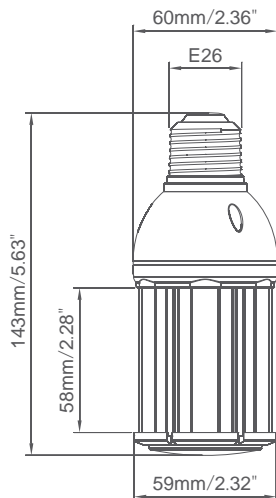


Beam Spread

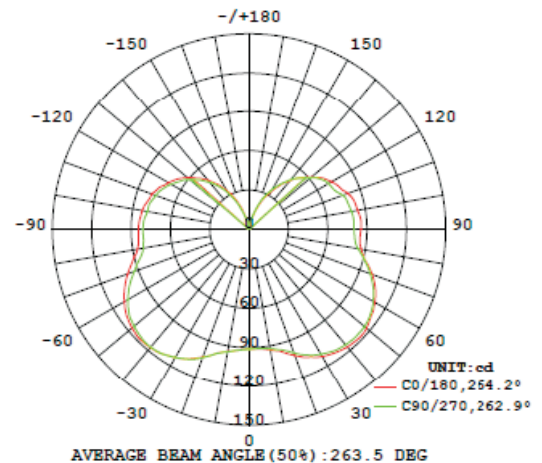

Lifespan of 10 years




Reliability Test




Surge Protection Circuit



Environmentally Friendly



Savings of 87% on Electrical Costs



Suitable for Enclosed Fixtures




Omni Directional

Dynasty® LED Omni Light 801 Series



Typical Installation

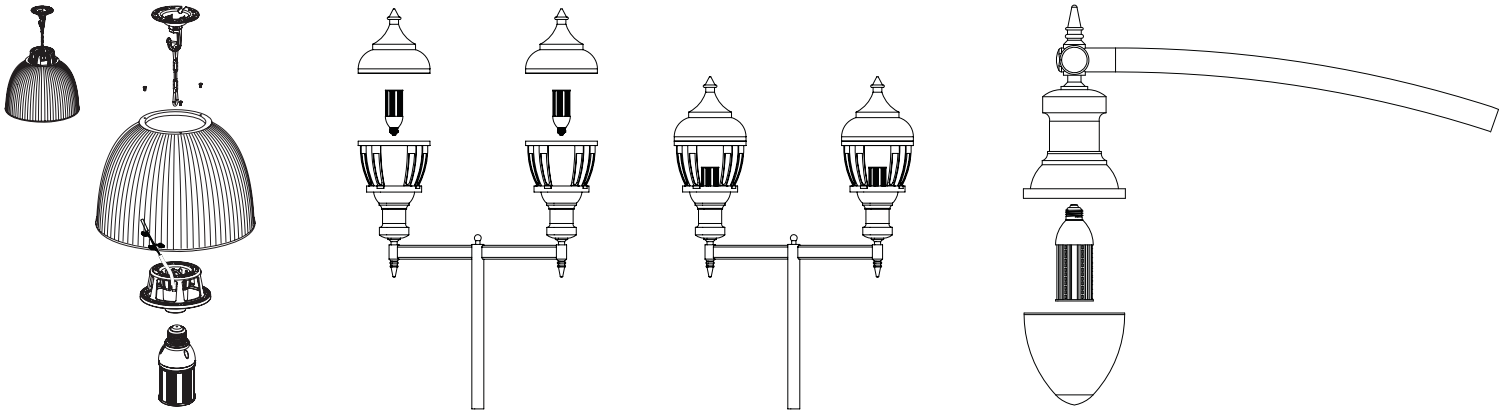


High Bay Lighting

Street Lighting / Acorn

Maximum Rating

Parameter	Rating	Units
Aluminum Heat Sink Temperature	50	C
Operating Temperature	-20~+65	C
Storage Temperature	-40~+80	C
Equilibrium Temperature	25	C


Wiring Diagram

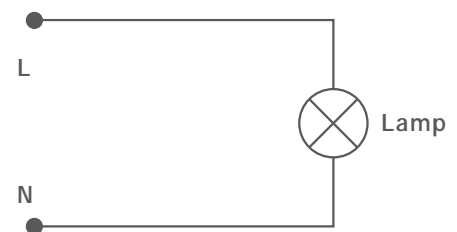

LED Omni Light Wiring Diagram

Product Packing Specification

Packing Details	
Pack Quantity	48pcs
Net Weight	0.55lbs/248g
Gross Weight Per CTN	32.19lbs/14.6kg
Box Size	2.87*2.87*6.46" 73*73*164mm
CTN Size	18.5*12.4*13.98" 470*315*355mm

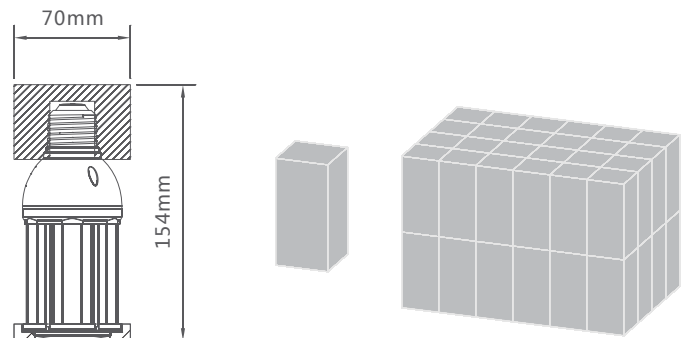

⚠ CAUTIONS

- Do not place lamp near flammable materials.
- Please allow lamp to cool before replacing.